




Drainage pumps with set-back Vortex type impeller for pumping charged waters and liquids with suspended solids; ideal for civil and household applications. The single-phase version includes a built-in capacitor, a thermal protector and it can be equipped with a float switch.



Grey water



Black water

Construction features

Pump body stainless steel with openings 1½" and 2"

Shell, motor cover, base support stainless steel



Impeller stainless steel set-back Vortex

Mechanical seal double seal with oil barrier: silicon carbide on pump side, sealing ring on motor side

Motor shaft stainless steel AISI 430

Free passage Ø max 28 mm

Max submergence 5 m

Liquid temperature 0 - 40 °C

Cable H07 RN8F, 10 m

G float switch

Motor


3~ 380V - 60Hz


2 Poles induction motor 1~ 220V - 60Hz
(with thermal protection)

Insulation class F

Protection degree IPX8


TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
DX	80×120×145	48	80×120×190	76

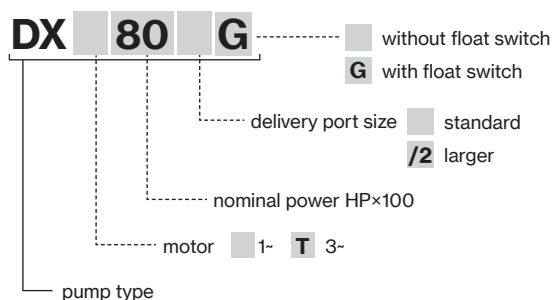

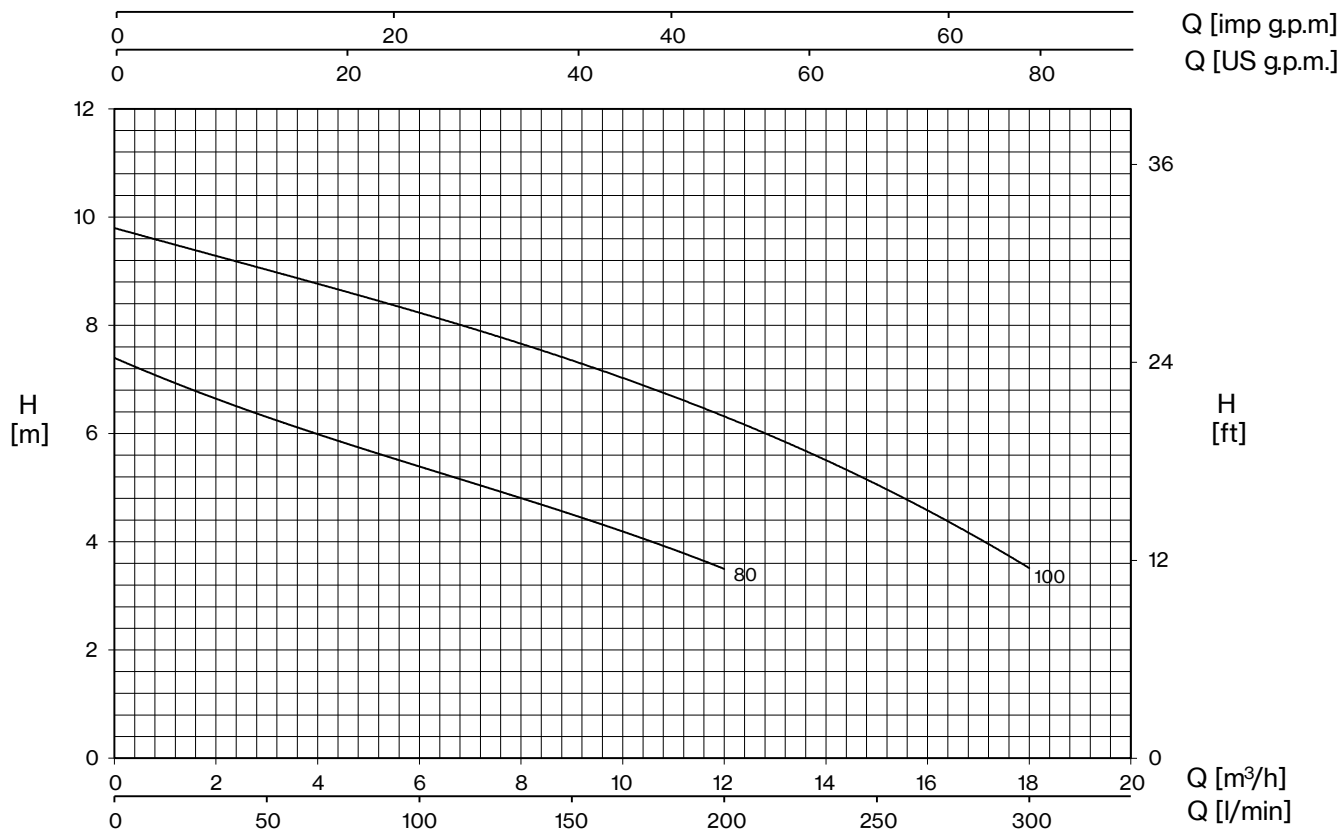

TYPE - 60 Hz		P1	CURRENT		Q (m³/h - l/min)						
1~	3~		1~ 220V	3~ 380V	0	3	6	9	12	15	18
					0	50	100	150	200	250	300
		kW	A		H (m)						
DX 80 (G)	DXT 80	1,05	4,7	2,2	7,4	6,3	5,4	4,5	3,5		
DX 80/2 (G)	DXT 80/2	1,05	4,7	2,2	7,4	6,3	5,4	4,5	3,5		
DX 100 (G)	DXT 100	1,35	6,2	2,8	9,8	9	8,3	7,3	6,3	5,1	3,5
DX 100/2 (G)	DXT 100/2	1,35	6,2	2,8	9,8	9	8,3	7,3	6,3	5,1	3,5

E: maximum emptying level
Mt: minimum liquid level for
continuos duty

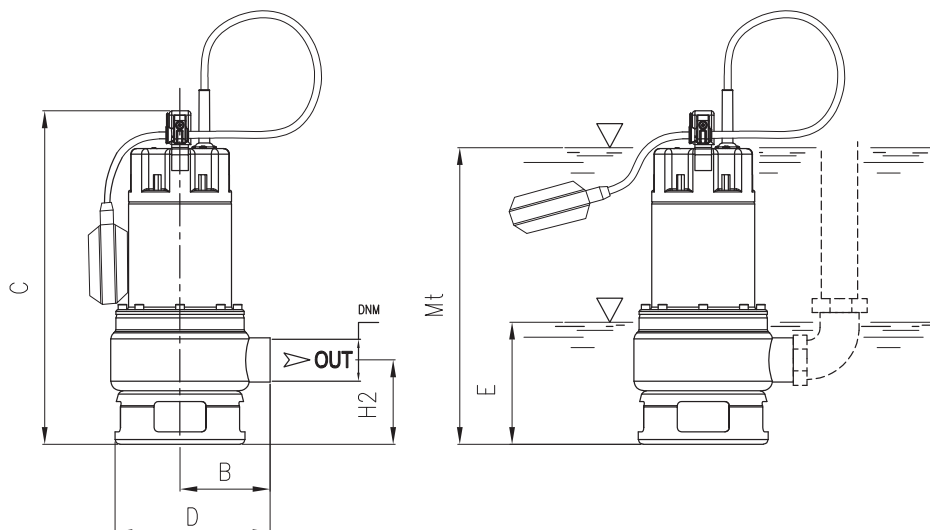

TYPE		DIMENSIONS (mm)							M			Kg
1~	3~	B	C	D	E	H2	Mt	DNM	I	L	M	
DX 80 (G)	DXT 80	104	400	183	125	112	280	1" ½ G	250	183	448	10,5
DX 80/2 (G)	DXT 80/2	114	400	183	125	112	280	2" G	250	183	448	10,5
DX 100 (G)	DXT 100	104	400	183	125	112	280	1" ½ G	250	183	448	12
DX 100/2 (G)	DXT 100/2	114	400	183	125	112	280	2" G	250	183	448	12

