

CMI 4 series



Product features

Thermal protector: single phase

Insulation: F

Protection: Ip55

Working conditions:

Medium temperature

low temperature: -20 +70°C

standard model: +15 +70°C

High temperature: +70 + +104°C

Enviromental temperature <50°C

Max. working pressure: 1.0MPa


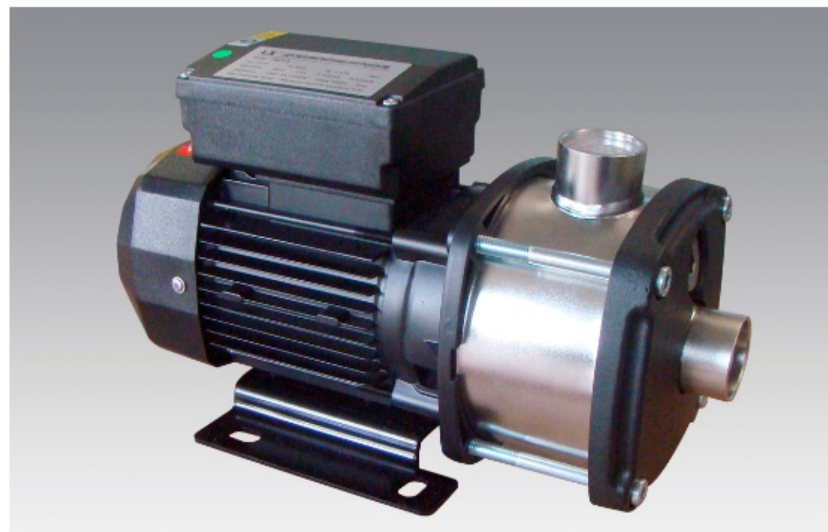



Table Performance

泵型号 Model	配用电机 Driving motor P ₂ (kW)	流量 Q (m ³ /h)	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5
CMI4-2	0.75	扬程 H (m)	28	27.5	27	26	25.5	25	24.5	24	23	22	21.5	19	17	15	13
CMI4-3	1.0		42	41	40	39	38.5	38	37	36	33.5	33	31.5	29	26	22	18
CMI4-4	1.0		56	55	53.5	52	51.5	51	49.5	48	46	44	41	39	35	29	24
CMI4-5	1.85		70	69	63	65	64	63	61.5	60	57	55	51	48	43	36	30

Curve Performance

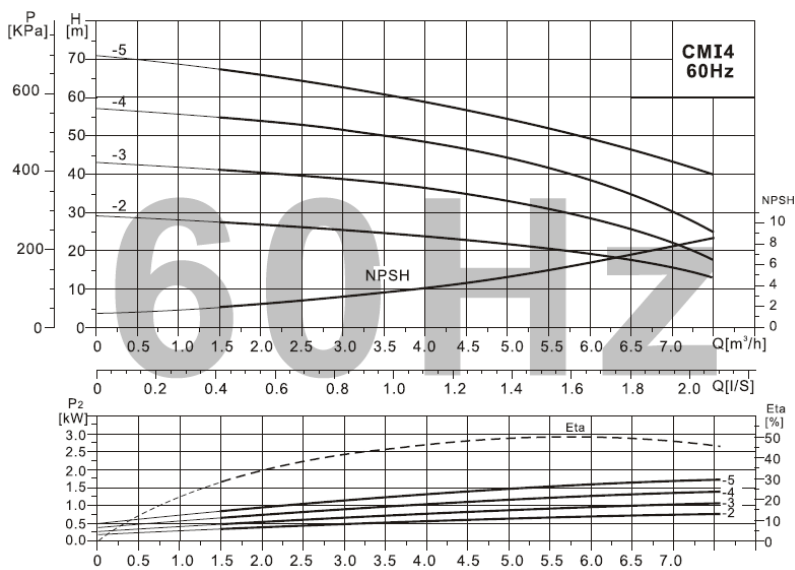

Installation Sketch

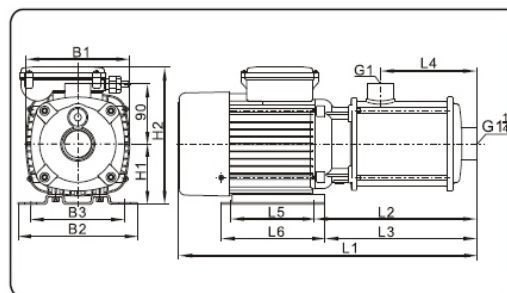

泵型号 Model	尺寸/Dimensions(mm)												重量 Weight (kg)	
	B1	B2	B3	H1	单相 Single Phase		三相 Three Phase		L2	L3	L4	L5		L6
					H2	L1	H2	L1						
CM14-2(T)	140	158	125	75	182	347	188	347	131	107	72	96	155	10.9
CM14-3(T)	140	158	125	75	185	347	188	347	131	107	72	96	155	11.5
CM14-4(T)	140	158	125	75	185	365	188	365	149	125	90	96	155	12.5
CM14-5(T)	155	178	140	90	244	426	211	410	207	192	108	125	155	17.5