
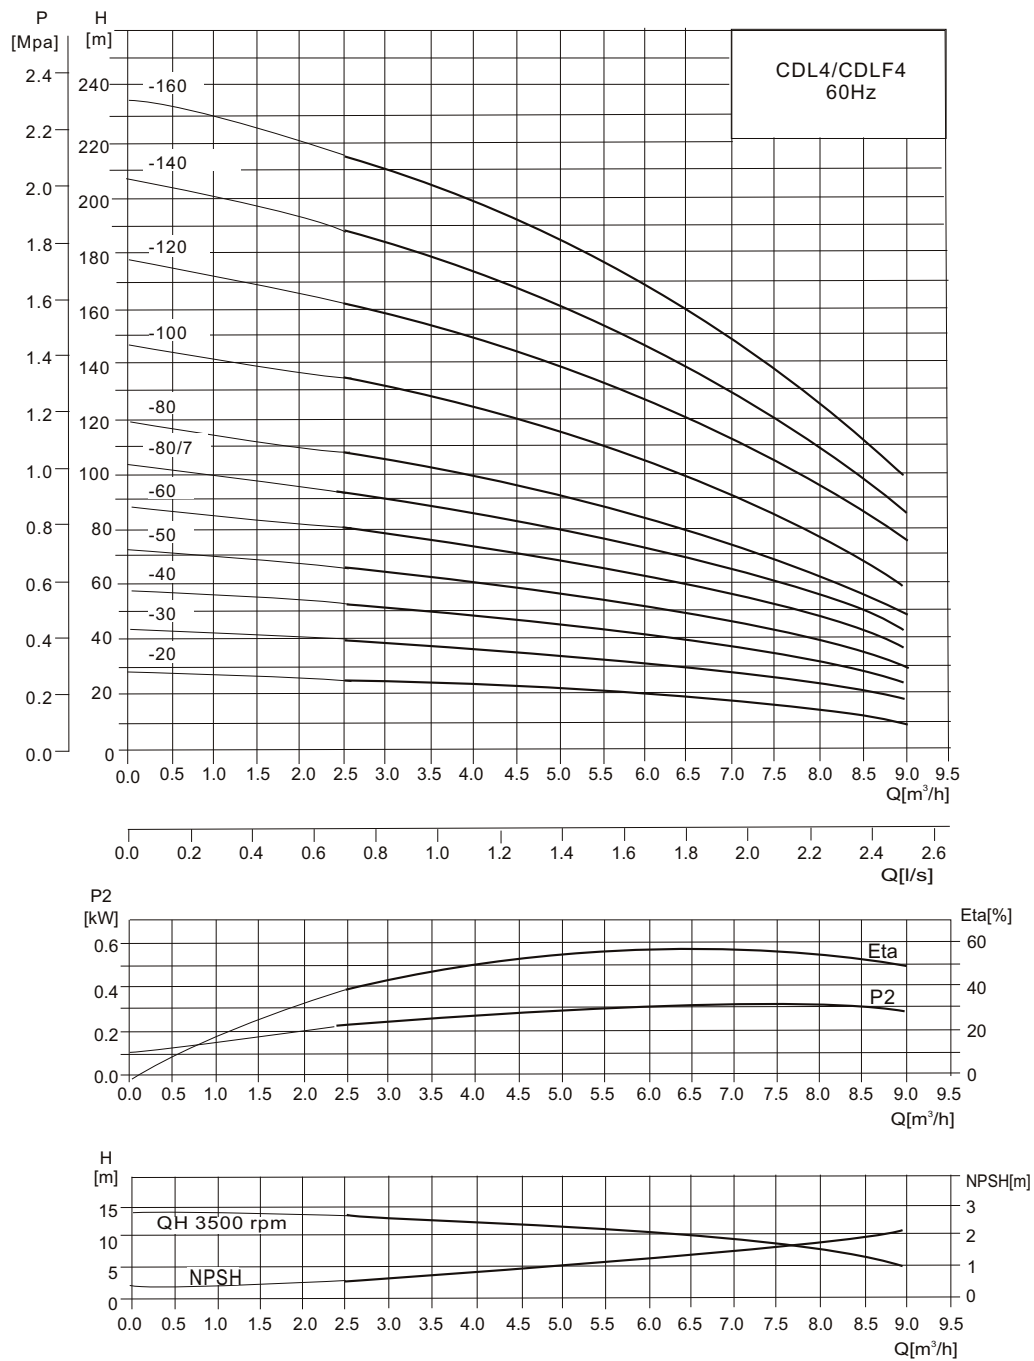


CDL,CDLF4

Performance curve


Installation sketch

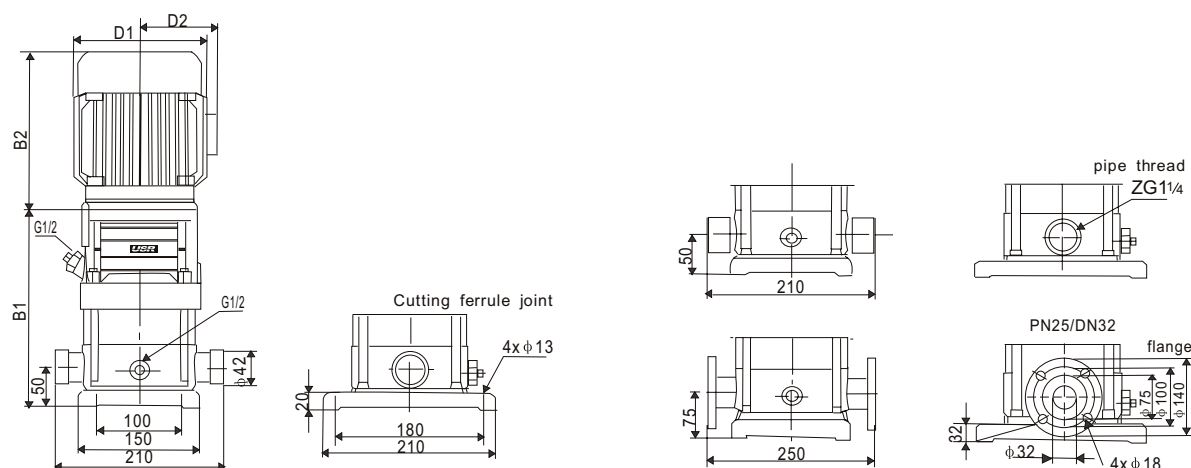

Performance table

Model	Driving motor (kW)	Q (m³/h)	2.5	3	4	5	6	7	8	9
CDL4-20	0.75	H (m)	26	25	23	21	19	16	14	11
CDL4-30	1.1		40	39	36	32	30	26	22	18
CDL4-40	1.5		53	52	48	44	41	35	31	24
CDL4-50	2.2		66	65	60	55	51	44	39	30
CDL4-60	2.2		80	78	73	67	61	54	47	36
CDL4-70	3		93	91	85	78	71	63	55	42
CDL4-80	3		107	104	97	90	82	73	63	49
CDL4-100	4		134	130	121	113	103	92	80	61
CDL4-120	4		161	156	145	136	125	111	96	74
CDL4-140	5.5		188	183	170	159	146	130	112	86
CDL4-160	5.5		215	210	196	183	168	149	128	99

Size and weight

Model	Size(mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
CDL4-20	241	225	466	170	142	20
CDL4-30	271	245	516	170	142	20
CDL4-40	312	245	557	190	155	25
CDL4-50	340	265	605	190	155	30
CDL4-60	367	265	632	190	155	35
CDL4-70	402	290	692	197	165	40
CDL4-80	429	290	719	197	165	40
CDL4-100	482	325	807	230	188	45
CDL4-120	536	325	861	230	188	45
CDL4-140	611	380	991	260	208	70
CDL4-160	665	380	1045	260	208	70